

PERFORMANT 88

Efficiency. Variety. Resistance.

Performant 88 residential doors are characterized by a multitude of technological performances that ensure a high level of reliability, outstanding thermal insulation, excellent weatherproofing and good static properties.

The greater thickness of the panel ensures both a higher level of insulation but a higher resistance to break-in attempts. You will always make the right decision by choosing the Performant 88 door.



0.14 btu



47 dB




THERMAL INSULATION

0.14 btu W/(m²K)



SOUND INSULATION

47 dB

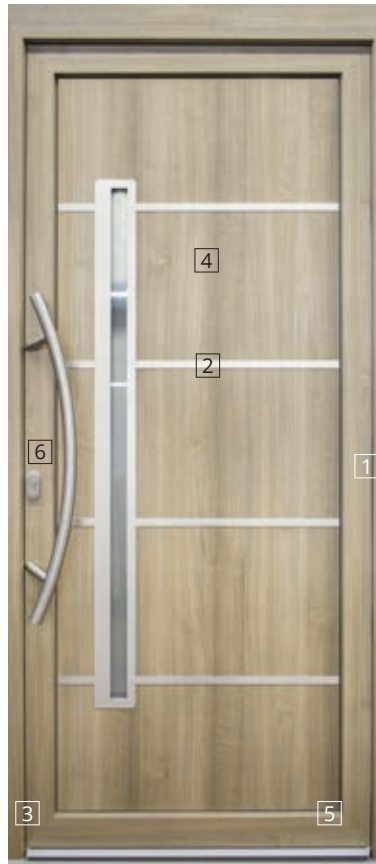

100% RECYCLABLE
5 YEARS WARRANTY

- 1 PVC 6-chamber profile with an $3 \frac{15}{32}$ constructive depth
- 2 Maximum size for doors with one leaf $47 \frac{1}{4} \times 94 \frac{31}{64}$
- 3 Gaskets: 2+1
- 4 Wide range of glass or panels with a standard thickness of $2 \frac{3}{64}$
- 5 Glass package rod: Aluminium or Warm Edge
- 6 Increased security due to the closing system with bolts and hooks

A wide range of construction options, doors with a single or multiple leaf, with skylights, decorative panels or even arched.

Colours: white, wood textures, mate, metallic or bicolour colours.

Glass options: 4 seasons, anti-burglary, secure, variety of frosted and decorative glass.

Personalization with horizontal, vertical, oblique or curved mullions or decorative PVC panels.

Hardware available in various shapes and colours, assorted handles and hinges, 3D or hidden hinges.